


Flood Light Luminaires

- Short Arc / Long Arc Lamps

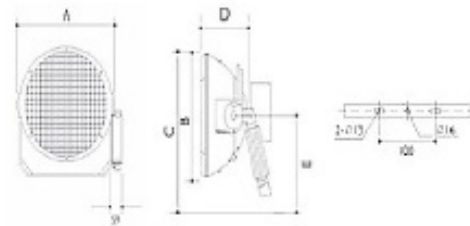


Applications

- Construction site
- Coal yard
- Railway marshalling yard
- Airport apron
- Sports stadium
- Facade lighting
- Security lighting
- High mast lighting

Construction

- Die cast aluminum corrosion resistant housing, heat resistant & toughened clear glass cover, heat resistant silicon rubber gasket, M.S. mounting cradle, SS mesh for safety
- Advanced Inner and Outer Powder coated
- Relamping from back side
- PsSFC20-6 (cable & lug) Lamp holder
- Earthing terminal
- Prewired upto terminal blocks
- IP 65 protection

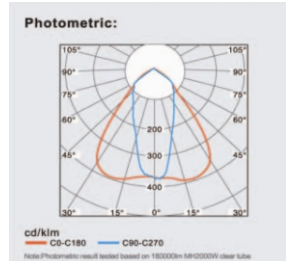

Reflector

- Electrochemically brightened and high purity anodised aluminium reflector
- 99.85% efficient light distribution

Part no	Lamp Type	Lamp Qty	Wattage	Nominal Rated Voltage	A	B	C	D	E	F
VL/AFL/NI/DE-2000W	MH	1	2000	380/400/415	531	470	500	451	250	300

Dimensions (mm) +/- 5%